


# Designer Square


## installation instructions

tranquillity  
bathroomware

### INSTALLATION & OPERATING INSTRUCTIONS

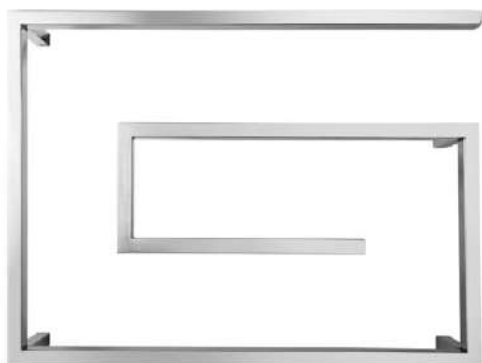


'G' 4 bar SQUARE  
PSG

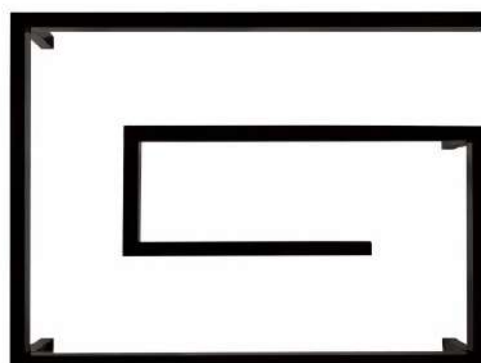


'G' 4 bar SQUARE BLACK  
PSG Black



'S' 5 bar SQUARE  
PSS

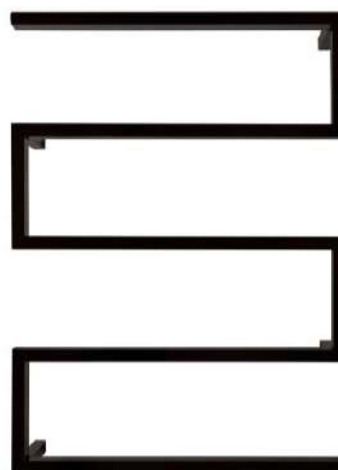

'S' 5 bar SQUARE BLACK  
PSS Black

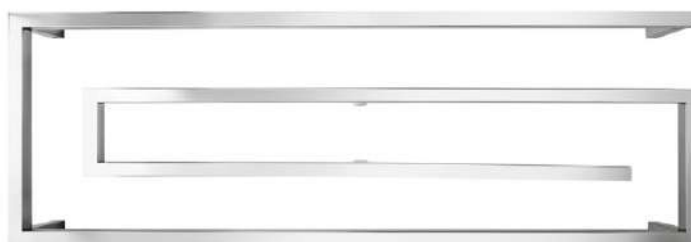

'P' 4 bar SQUARE  
PSPC

Please note that this appliance must be installed as prescribed by the relevant wiring rules and regulations, including the regulations covering installation of appliances and accessories in 'wet areas' such as bathrooms, showers and laundries. Installations should be in accordance with AS/NZS 3000:2007.

Note :

- This class 1 appliance requires an earth connection.
- An accessible all pole disconnection switch is required in the fixed wiring.

The heated towel rail should be mounted vertically with the cord exiting from the base; it should be positioned at least 600mm above the floor.

## SAFETY INFORMATION

As with any electrical appliance, you should be aware of the basic safety precautions when using this heated towel rail. Please read these instructions and file them for future reference.

- This appliance is not to be used by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction. According to EN60335-1 requirements,, this appliance can be used by children aged from 8 years and above and persons with reduced physical, sensory or mental capabilities or lack of experience and knowledge if they have been given supervision or instruction concerning use of the appliance in a safe way and understand the hazards involved.
- Because this appliance gets hot, young children and infirm people should be closely supervised when near the appliance. Children should be supervised to ensure that they do not play with the appliance. Cleaning and user maintenance shall not be made by children without supervision.

**WARNING: In order to avoid a hazard for very young children, this appliance should be installed so that the lowest heated rail is at least 600mm above the floor.**

- Be aware that the towel rail will get slightly hotter than normal during warmer weather and when insulated by towels.
- Install the towel rail at least 100 mm away from all permanent objects in the surrounding area. A minimum spacing of 80mm must be observed between two adjacent rails.
- This means for disconnection must be incorporated in the fixed wiring in accordance with the wiring rules. The rail should NOT be used for anything other than its intended use.
- It would be very dangerous to put the towels or anything else which has been in contact with hazardous liquids on this towel rail.
- The appliance must only be supplied at safety extra low voltage corresponding to the marking on the appliance. Use this appliance only on the voltage specified on the rating label.
- Electrical work should only ever be done by authorised persons.
- This towel rail is to be installed so that the switches and other controls cannot be touched by a person in the bath or shower.
- DO NOT immerse the towel rail in any liquid.
- Make sure the supply cord never touches heated surfaces.
- Special purpose tools are required for the replacement of the power supply cord and element.
- Ensure that the towel rail is wiped down from time to time with a damp cloth and a stainless steel cleaner. Do not use any abrasives or corrosive cleaners.
- If the electrical cord or connection is damaged DO NOT attempt to repair, please contact the supplier. It must be replaced by the manufacturer or similarly qualified persons in order to prevent a hazard.


**WARNING: DO NOT** install towel rails in areas which may be subjected to saturation of water resulting in ingress of moisture. It is recommended that all units are protected via a R.C.D (Residual Current Device) circuit.

### Operation:

It will take about ¾ hour to heat up to the desired temperature and can, if desired, be left running constantly.

## RECOMMENDED MOUNTING PROCEDURES

- Put the towel rail against the wall in the desired position.
- Using a pencil, draw around the end of each tube to mark their positions on the wall – ensuring that the rail is square on the wall.
- Remove the rail from the wall.
- Using a suitable drill bit and adequate drill, drill a hole into the tiles/wall to the required depth.
- Place a wall plug in the hole.
- Place a screw inside the wall anchor and then screw it into the wall plug.
- Put the towel rail on once all four anchors are in place then tighten using the Allen key provided.

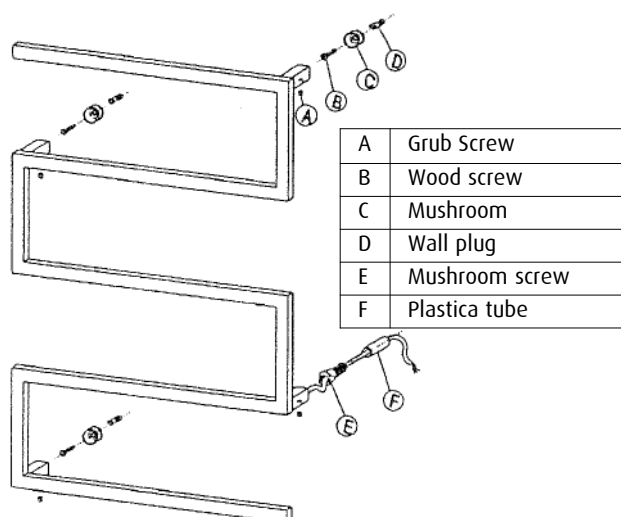

## SPECIFICATIONS

Model	PSG/PSG Black	PSS/ PSS Black	PSPC
Dimensions	600(h) x 800(w) mm	900(h) x 650(w) mm	400(h) x 1200(w) mm
Height	600mm	900mm	400mm
Width	800mm	650mm	1200mm
Depth	115mm	115mm	115mm
Bars	4	5	4
<b>Electrical</b>			
Wattage	60W	60W	75W
Supply 230-240V ~ 50Hz, single phase Ingress Protection Rating: IP45 – Splashproof Class I appliance – requires earth connection			